

Williamsberg



TerraCast[®]

PRODUCTS

Construction:

Cast Aluminum with Brass and Stainless Steel Screws, for **RUST FREE LIFE**. The Fitter is 3 inches in diameter. The fixture finish is a thermoplastic modified Nitocelloucs coating. All electrical components are UL recognized. This fixture has a UL label and is suitable for wet locations. Sockets are medium and mogul for HID use and have nickel plated screw shell with center contacts 1500W pulse rated. All ballast are UL approved factory wired and pre-tested.

Colors:

All 53 colors, Powder Coating Available Contact Factory.

Lens:

Seedy, Ripple, Pebble, Honey, Rose Opal, Pearl, Prismatic

Ballast/Lamps:

CF13-26; HPS35-250; MH50-250; LED35W



Voltage:

120; 208; 240; 277

Options:

Refractor Type V, Black-out Panel

	Photometrics
A= Height	Lamp ~ 150 HPS
	Lumens ~ 16000
B= Width	Mounting Height ~ 12 Feet
	Lens ~ Clear

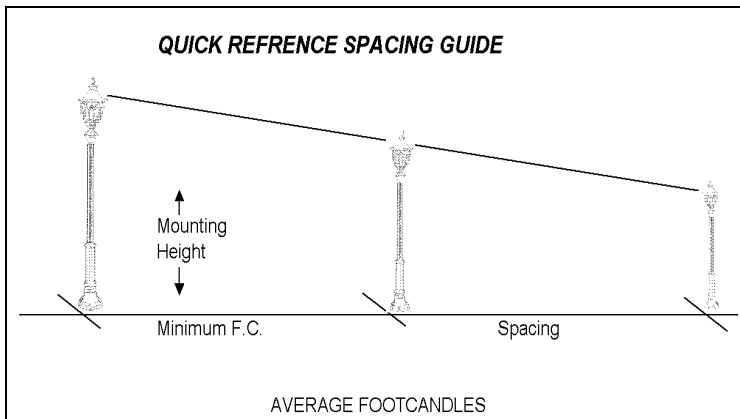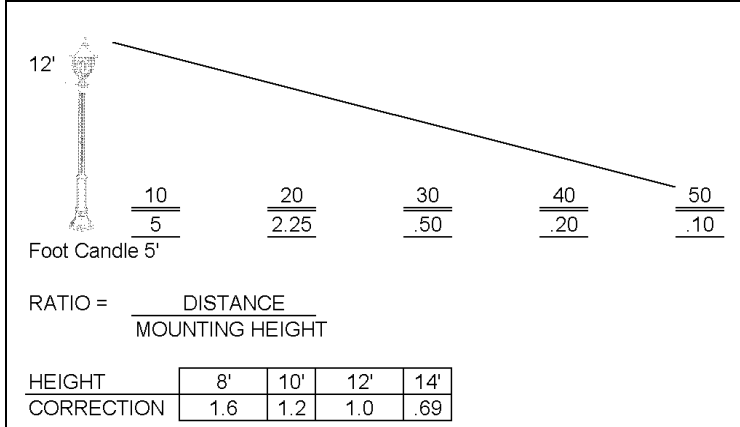

HPS	LAMP	35	50	70	100	150	250
	CORRECTION	.14	.25	.36	.59	1.00	1.72

MH	LAMP	50	70	100	175	250
	CORRECTION	.18	.31	.53	.88	1.28

COM FL	LAMP	13	26
	CORRECTION	.05	.10

LED	LAMP	22	35
	CORRECTION	0.71	0.98