

TerraCast[®]


PRODUCTS

4400 NW 19th Avenue, Unit K
 Pompano Beach, FL 33064
 (305) 895-9525
 www.terraCastproducts.com

CHARLESTON 4H2 POLE SPECIFICATIONS

| | | | |
|---------------------------------|--|----------------------------------|---|
| <u>Pole Material:</u> | Aluminum Smooth Extrusion | <u>Colors:</u> | All 52 Colors, Powder Coating Available Contact Factory. |
| <u>Wall Thickness:</u> | .250 | <u>Available Heights:</u> | 8', 10', 12', 14' |
| <u>E.P.A.:</u> | 1.0 | <u>Center Post:</u> | 4" Diameter |
| <u>Wind Load Factor:</u> | 140 MPH | <u>Base:</u> | 29 1/2" Height 12" Width |
| <u>Base Material:</u> | Template mounting plate is solid Cast Aluminum 29 1/2" high, 12" wide. Post fitter is 1/2" thick, 3 1/2" deep. Mounting seat for anchor bolts is 1/2" thick. | | |
| <u>Post Assembly:</u> | Pole is force fit into sleeve and is reinforced by 1" weld all around. | | |
| <u>Mounting:</u> | Supplied with four (4) "L" shaped 16" x 1/2" Hot Dipped Galvanized Bolts. Supplied is bolt Pattern for setting anchor bolts in cement. | | |
| <u>Access Plate:</u> | Access Door is cast aluminum 8 1/2" x 6", 1/2" thick. | | |
| <u>Reducer:</u> | 4" to 3" reducer supplied with all poles. | | |

Bolt pattern 8"

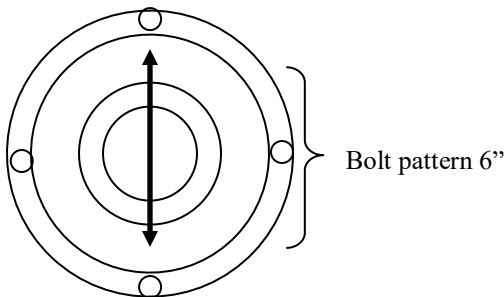

View From Above Template



Door is 8 1/2" x 6".

