


4400 NW 19th Avenue, Unit K Pompano Beach, FL 33064 (305) 895-9525 www.terracastproducts.com

PENNSYLVANIAN 4C POLE SPECIFICATIONS

<u>Pole Material:</u> <u>Wall Thickness:</u>	Aluminum Smooth Extrusion	<u>Colors:</u>	All 52 Colors, Powder Coating Available Contact Factory.
<u>E.P.A:</u>	1.0	Available Heights:	8′, 10′, 12′, 14′
Wind Load Factor:	140 MPH	<u>Center Post:</u>	4" Diameter
<u>Base Material:</u>	Template mounting plate is solid Cast Aluminum 33" high, 10 $\frac{1}{4}$ " wide. Post fitter is $\frac{1}{2}$ " thick, 3 $\frac{1}{2}$ " deep. Mounting seat for anchor bolts is $\frac{1}{2}$ " thick.	<u>Base:</u>	33″ Height 10 ¼″ Width
Post Assembly:	Pole is force fit into sleeve and is reinforced by 1" weld all around.		
<u>Mounting:</u>	Supplied with four (4) "L" shaped $16" \times \frac{1}{2}"$ Hot Dipped Galvanized Bolts. Supplied is bolt Pattern for setting anchor bolts in cement.		
Access Plate:	Access Door is cast aluminum 5 $\frac{1}{2}$ "x 6 $\frac{1}{2}$ " thick.	H	
<u>Reducer</u> : poles.	4" to 3" reducer supplied with all		

Bolt pattern 5¹/₂" cc.

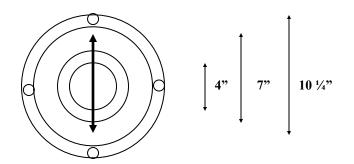

View From Above Template

