

TerraCast[®]

PRODUCTS

4400 NW 19th Avenue, Unit K
 Pompano Beach, FL 33064
 (305) 895-9525
 www.terraCastproducts.com

PENNSYLVANIAN 4C2 POLE SPECIFICATIONS

Pole Material: Aluminum Smooth Extrusion

Wall Thickness: .250

E.P.A.: 1.0

Wind Load Factor: 140 MPH

Base Material: Template mounting plate is solid Cast Aluminum 33" high, 10 ¼" wide. Post fitter is ½" thick, 3 ½" deep. Mounting seat for anchor bolts is ½" thick.

Post Assembly: Pole is force fit into sleeve and is reinforced by 1" weld all around.

Mounting: Supplied with four (4) "L" shaped 16" x ½" Hot Dipped Galvanized Bolts. Supplied is bolt Pattern for setting anchor bolts in cement.

Access Plate: Access Door is cast aluminum 5 ½" x 6 ½" thick.

Reducer: 4" to 3" reducer supplied with all poles.


Colors: All 52 Colors, Powder Coating Available Contact Factory.

Available Heights: 8', 10', 12', 14'

Center Post: 4" Diameter

Base: 33" Height
10 ¼" Width

Bolt pattern 5½" cc.

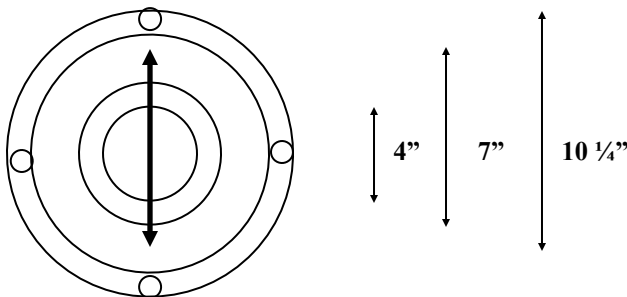

View From Above Template



Door is 5 ½" x 6 ½".