

TerraCast[®]


PRODUCTS

4400 NW 19th Avenue, Unit K
 Pompano Beach, FL 33064
 (305) 895-9525
 www.terraCastproducts.com

STAFFORD 4E2 POLE SPECIFICATIONS

<u>Pole Material:</u>	Aluminum Smooth Extrusion	<u>Colors:</u>	All 52 Colors, Powder Coating Available Contact Factory.
<u>Wall Thickness:</u>	.250	<u>Available Heights:</u>	8', 10', 12', 14'
<u>E.P.A.:</u>	1.0	<u>Center Post:</u>	4" Diameter
<u>Wind Load Factor:</u>	140 MPH	<u>Base:</u>	13 1/2" Height 10 1/4" Width
<u>Base Material:</u>	Template mounting plate is solid Cast Aluminum 13 1/2" high, 10 1/4" wide. Post fitter is 1/2" thick, 3 1/2" deep. Mounting seat for anchor bolts is 1/2" thick.		
<u>Post Assembly:</u>	Pole is force fit into sleeve and is reinforced by 1" weld all around.		
<u>Mounting:</u>	Supplied with four (4) "L" shaped 16" x 1/2" Hot Dipped Galvanized Bolts. Supplied is bolt Pattern for setting anchor bolts in cement.		
<u>Access Plate:</u>	Access Door is cast aluminum 5 1/2" x 6 1/2" , 1/2" thick.		
<u>Reducer:</u>	4" to 3" reducer supplied with all poles.		

Bolt pattern 5 1/2" cc.

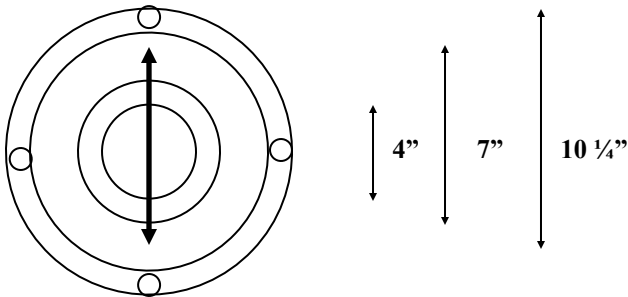

View From Above Template



Door is 5 1/2" x 6 1/2"