

# TerraCast<sup>®</sup>


PRODUCTS

4400 NW 19th Avenue, Unit K  
 Pompano Beach, FL 33064  
 (305) 895-9525  
 www.terraCastproducts.com

## JUPITER 4D2 POLE SPECIFICATIONS

<b><u>Pole Material:</u></b>	Aluminum Smooth Extrusion	<b><u>Colors:</u></b>	All 52 Colors, Powder Coating Available Contact Factory.
<b><u>Wall Thickness:</u></b>	.250	<b><u>Available Heights:</u></b>	8', 10', 12', 14'
<b><u>E.P.A.:</u></b>	1.0	<b><u>Center Post:</u></b>	4" Diameter
<b><u>Wind Load Factor:</u></b>	140 MPH	<b><u>Base:</u></b>	26" Height 12" Width
<b><u>Base Material:</u></b>	Template mounting plate is solid Cast Aluminum 26" high, 12" wide. Post fitter is ½" thick, 3 ½" deep. Mounting seat for anchor bolts is ½" thick.		
<b><u>Post Assembly:</u></b>	Pole is force fit into sleeve and is reinforced by 1" weld all around.		
<b><u>Mounting:</u></b>	Supplied with four (4) "L" shaped 16" x ½" Hot Dipped Galvanized Bolts. Supplied is bolt Pattern for setting anchor bolts in cement.		
<b><u>Access Plate:</u></b>	Access Door is cast aluminum 3 ½"x 6 ½", ½" thick.		
<b><u>Reducer:</u></b>	4" to 3" reducer supplied with all poles.		

Bolt pattern 5½" cc.

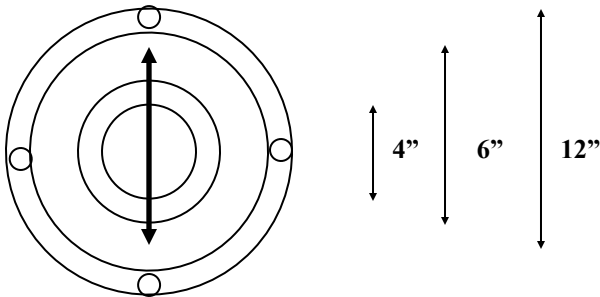

View From Above Template



Door is 3 ½"x 6 ½".